



MBL160

Excellent optical efficiency

The MBL160 is a standalone LED marine lantern of short and medium range, with a great optical efficiency and low consumption, fitted with LED diodes of high intensity, reaching a maximum range of 12 nautical miles.

Low consumption

Ideal for on- and off-shore solar beaconing applications requiring a low consumption, such as channels, harbour entrances, jetties, piers, buoys, structures, fish farms, etc.

Long service life

Its luminous source consists of an innovating lens system especially designed to take the maximum profit of LED diodes. Manufactured with high-quality and resistant materials, the MBL160 provides a long service life under harsh marine conditions.


Designed according to IALA Recommendations.



FEATURES

- *High-efficiency luminous system.*
Up to 12 nm ($T=0.74$), 16 nm ($T=0.85$).
- *360° horizontal output.*
- *Average operation lifetime over 10 years.*
- *Internal photocell adjustable in lux.*
- *IP 68 watertightness degree (immersion resistant).*
- *Linear adjustment of luminous intensity.*
- *USB-C serial port for setting adjustments by PC and RS-232 serial port for remote monitoring system.*
- *Programming, configuration and operating status via PC, Bluetooth, or IR programmer as an option.*
- *Ready to integrate remote monitoring via GSM, satellite, AIS AtoN, IoT or MODBUS, synchronization module via GPS.*
- *Short-circuit, reverse-polarity and transient over-voltage protections.*
- *PATENTED OPTICAL SYSTEM.*

MBL160

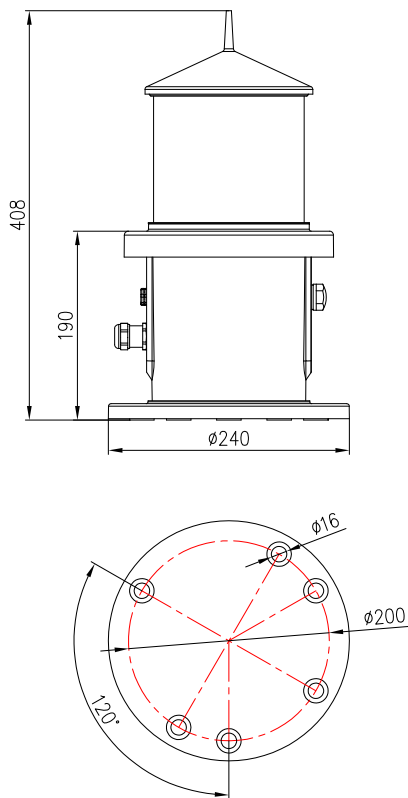


Technical Features

Light source:	3 to 12 nos. ultra-bright LED diodes, with high-precision acrylic lens, distributed in up to four levels.
Luminous range:	Up to 12 nm (T=0.74) 16 nm (T=0.85).
Vertical divergence:	5° or 12° (50% I ₀).
LED average life:	More than 100.000 hours.
Power supply:	From 9 to 36 V.
Lantern consumption:	Up to 15 W per level.
Flash rhythms:	256 (6 nos. user selectable).
Base:	Glass-fibre reinforced polyamide PA66-GF30.
Lens cover:	Methacrylate, UV stabilised.
Watertightness degree:	IP 68.
Programming:	PC, Bluetooth, or IR programmer as an option.

Options

Removable bird deterrent as an option.
 PC programming kit.
 RS-485 (MODBUS) serial port.
 Marine aluminium base.
 IR programmer as an option.
 MBL160-TG (GSM remote monitoring).
 MBL160-TS (Satellite remote monitoring).
 MBL160-AIS (AIS AtoN).
 MBL160-IoT (IoT).
 Other specifications available under request.
 Other divergences on request.

Peak intensities (Cd)

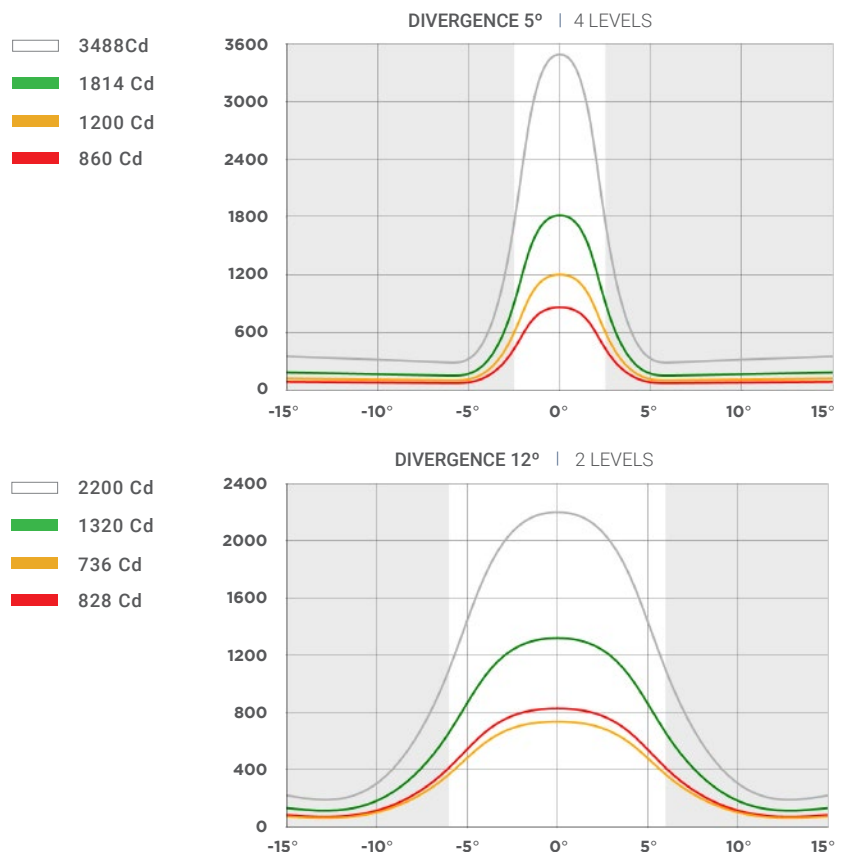

smartcom360

Download our
Smartcom360 software
and configure the lantern



Specifications subject to change without
previous notice.



Mediterráneo Señales Marítimas, S.L. / ☎ +34 96 276 10 22 / ✉ msm@mesemar.com / 🌐 www.mesemar.com

